

BARONESS PRODUCTS LINEUP | **Mid-Mount Rotary Mower**

GM1700

LM Series GM Series HM Series Speciality Equipment



This rotary slope mower has a low center of gravity and pivoting seat which allows it to cut banks up to 25°.

GM1700 Features


- The contour cutting deck improves the ability to follow undulating terrains.
- The three-split unit trims the grass evenly on uneven and complex terrains.
- The low center of gravity design improves operating performance and traction on slope areas.
- Optional SunShade and Protective net.

Specifications

Model	GM1700		
Dimensions	Total length	100.39 in 255 cm	
	Total width	60.63 in 154 cm	
	Total height	Roof	77.56 in 197 cm
steering wheel		47.64 in 121 cm	
Weight (with ROPS and empty fuel tank)	1596.12 lb 724 kg		
Minimum turning radius	117.32 in 298 cm		
Engine	Model	Kubota D1105	
	Type	Vertical Water-cooled 4-cycle diesel engine	
	Total displacement	68.52 cu.in. 1,123 cm ³ (1.123 L)	
	Maximum output	17.8 kW (24.2 PS)/2,800 rpm	
Fuel tank capacity	Diesel 6.08 U.S.gal. Diesel 23.0 dm ³ (23.0 L)		
Operating width (Mowing width)	See the mower deck's specifications.		
Operating height (Mowing height)	See the mower deck's specifications.		
Blades	3		
Drive	HST, 2WD/4WD selectable		
Speed (HST)	Forward	2WD: 0 - 9.94 mph 0 - 16.0 km/h 4WD: 0 - 4.97 mph 0 - 8.0 km/h	
	Reverse	2WD: 0 - 8.70 mph 0 - 14.0 km/h 4WD: 0 - 4.35 mph 0 - 7.0 km/h	
Efficiency	See the mower deck's specifications.		
Maximum inclination for operation	25 degrees		
Tire size	Front wheel	21 x 11.00 - 10	
	Rear wheel	21 x 11.00 - 10	

The factory default maximum engine rpm is 2,800 rpm.

[AU/GB/US]

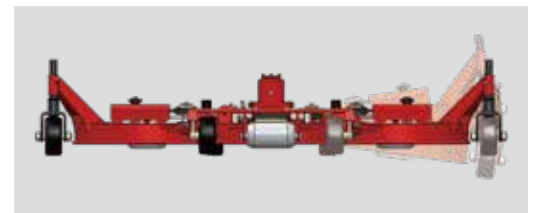

*The model shown is equipped with optional features.

Model	Contour Deck for GM1700	
Dimensions	Total length	42.52 in [100.39 in] 108 cm [255 cm]
	Total width	72.05 in [72.05 in] 183 cm [183 cm]
	Total height	14.57 in 37 cm
Weight	365.96 lb [1962.08 in] 166 kg [890 kg]	
Operating width (Mowing width)	59.45 in 151 cm	
Operating height (Mowing height)	1.38 - 3.74 in (0.59 in spacing, 5 levels)	35 - 95 mm (15 mm spacing, 5 levels)
Blades	3	
Blade length	20.98 in 533 mm	
Efficiency	1.5 acres/hour (3.11 mph x mowing width x 0.8)	16,040 m ² /h (5.0 km/h x mowing width x 0.8)

*Values within [] are dimensions and weight of GM1700 main vehicle equipped with Contour Deck, ROPS and empty fuel tank.

[AU/GB/US]

⚠ Safety notes

- Read the Owner's Operating Manual and other training material carefully. Be familiar with the controls, safety signs and the proper use of equipment before operation.

❤ Assurance inspection

- Regular inspection of the machine ensures long-lasting superior performance and safety.
- There are parts of machine prone to wear and deterioration from long periods of use. Please consult with local dealer or distributor for proper inspection and maintenance schedule.

 株式会社 共栄社

KYOEISHA CO., LTD.

1-26, Miyuki-cho, Toyokawa-city, Aichi-pref, 442-8530 Japan
TEL+81 533-84-1390 FAX+81 533-84-1220

www.baroness.co.jp



JQA-QM5163

Your distributor or dealer

BARONESS
Quality on Demand

- Content and designs provided here are subject to change without notice.
- Colors in print may slightly vary from actual colors.
- Catalog No: GM1700-US/18M-0300-keywest